

BROMIC
REFRIGERATION

Confidence and control.

Upright Fridges & Freezers Range

Display | Storage





Industry Leaders in Plug-in Commercial Refrigeration



Refrigeration Specialists

Since 1999, we have curated a range that spans the wide spectrum of plug-in refrigeration equipment to meet the needs of businesses in hospitality, retail, and healthcare sectors.



Expert Local Support

We offer a tailored equipment solution, taking into consideration your specific needs. We then connect you with a trusted local dealer who stocks the units you require.



Confident Compliance

Our in-house engineering team ensures that our products meet and exceed Australian standards and regulations, including MEPS, GEMS, RCM, Watermark, and others.



Energy Efficiency and Sustainability

We proudly lead the way with our Green Cooling initiative. All our ranges utilise natural refrigerants, which are highly energy-efficient and have a close to 0 GWP (Global Warming Potential).



Available Australia-wide

With a nationwide distribution network, we can deliver our refrigeration products to your door quickly and efficiently.



5 Year Extra Care Warranty Service

We offer a one-stop support service for your peace of mind, no matter where you are in Australia.

Legend



NON-PERISHABLE DRINKS



HOT FOODS



DAIRY PRODUCTS



ICE CREAM/GELATO



PERISHABLE PRODUCTS



FROZEN PRODUCTS



BAKERY/CONFECTIONERY



MEDICAL PRODUCTS

ICE TYPES



SOLID ICE



HOLLOW ICE



HALF-DICE ICE



FLAKE ICE





The
Nosh
Project

HUMAN GRADE
PET NUTRITION

Frozen food





Upright Fridges & Freezers

Bromic's Upright Fridges and Freezers have been engineered with durability, practicality, and food safety compliance in mind. Choose from glass door display models that entice customers to purchase, or solid door units that are built to withstand the rigorous of demanding commercial kitchen environments.

Upright Display Fridges

Bromic's upright display fridge combines generous storage capacity with high-impact presentation for busy commercial settings. A bright LED lightbox and vertical door lighting enhance product visibility and help drive customer engagement, while six adjustable shelf tiers allow you to tailor the display to suit your range.

High-impact LED lightbox to capture customer's attention

Food safe storage with 3M1 climate class

6 shelf tiers including base for display flexibility

Self-closing doors ensure tight seal every time to minimise heat transfer

Heated, Low-E double glazed glass for improved condensation performance

5-star GEMS energy Rating

High-impact LED lights on the left and right side of the door


Fully compliant with Australian safety standards and regulations

38°C maximum ambient temperature for consistent cooling even in extreme heat

Lockable front castors for easy and secure positioning

Accurate temperature control with digital controller



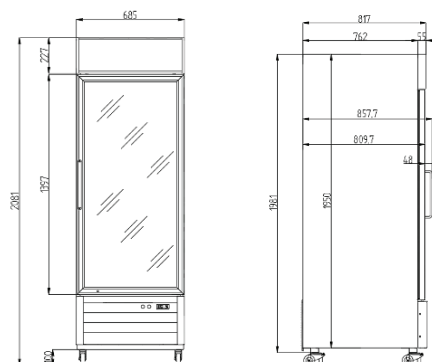


Upright Display Fridge (Flat Glass 1 Door)

UC0550GDL-NR

Part No.	Volume	Weight
3736260-NR	546L	136kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	685	569	900
Depth	865	670	900
Height	2081	1534	2132

- Temperature range: +1°C to +10°C
- Max ambient temp: 38°C
- 6 stars GEMS rating
- 3M1 climate class
- 6 shelf tiers including base for optimal product display

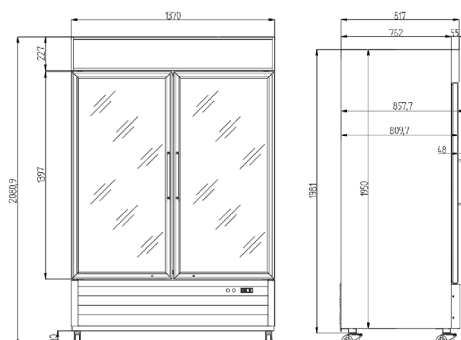5 YEAR EXTRA CARE WARRANTY


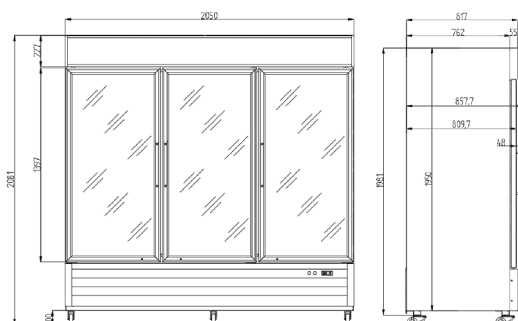
Upright Display Fridge (Flat Glass 2 Door)

UC1250GDL-NR

Part No.	Volume	Weight
3736261-NR	1266L	232kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	1370	1254	1430
Depth	865	670	898
Height	2081	1534	2132

- Temperature range: +1°C to +10°C
- Max ambient temp: 38°C
- 5 stars GEMS rating
- 3M1 climate class
- 6 shelf tiers including base for optimal product display

5 YEAR EXTRA CARE WARRANTY


Upright Display Fridge (Flat Glass 3 Door)



UC1980GDL-NR

Part No.	Volume	Weight
3735262-NR	1980L	314kg

	External (mm)	Internal (mm)	Packaged (mm)
Width	2505	1934	2110
Depth	865	670	898
Height	2081	1534	2132

- Temperature range: +1°C to +10°C
- Max ambient temp: 38°C
- 5 stars GEMS rating
- 3M1 climate class
- 6 shelf tiers including base for optimal product display

5 YEAR EXTRA CARE WARRANTY

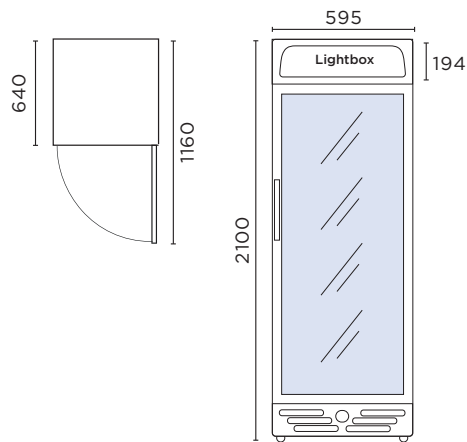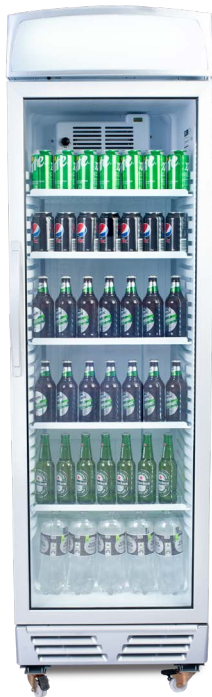
Upright Display Fridge (Flat Glass Door)

GM0374L-NR

Part No.	Volume	Weight	
3736036-NR	372L	85kg	
.....			
	External (mm)	Internal (mm)	Packaged (mm)
Width	595	505	665
Depth	640	462	685
Height	2100	1555	2150

- Temperature range: +1°C to +7°C
- Max. ambient temp: 40°C
- 9 stars GEMS rating
- 3M1 climate class
- 6 shelf tiers including base for optimal product display
- Lightbox included

5 YEAR EXTRA CARE WARRANTY

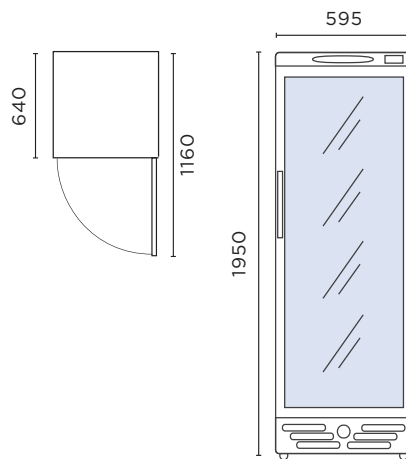

Upright Display Fridge (Flat Glass Door)


GM0374-NR

Part No.	Volume	Weight	
3736035-NR	372L	81kg	
	External (mm)	Internal (mm)	Packaged (mm)
Width	595	505	665
Depth	640	462	685
Height	1950	1555	2010

- Temperature range: +1°C to +7°C
- Max. ambient temp: 40°C
- 9 stars GEMS rating
- 3M1 climate class
- 6 shelf tiers including base for optimal product display

5 YEAR EXTRA CARE WARRANTY



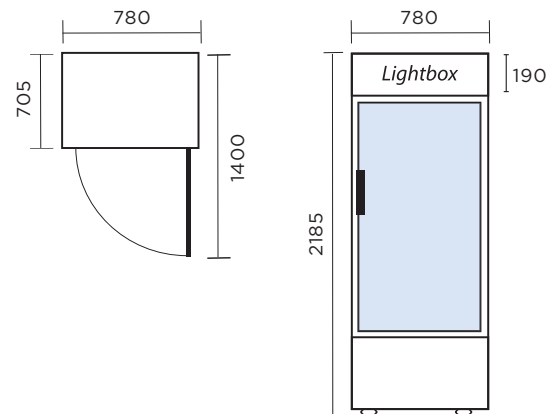


Upright Display Fridge (Flat Glass)

GM0690LW

Part No.	Volume	Weight	
3736219	659L	123kg	
	External (mm)	Internal (mm)	Packaged (mm)
Width	780	702	870
Depth	705	555	750
Height	2185	1682	2200

- Temperature range: +1°C to +5°C
- Max. ambient temp: 43°C
- 7 stars GEMS rating
- 3M1 climate class
- 6 shelves tiers including base for optimal product display
- Lightbox included
- Double glazed Low-E argon glass door reduces energy consumption and condensation

5 YEAR EXTRA CARE WARRANTY

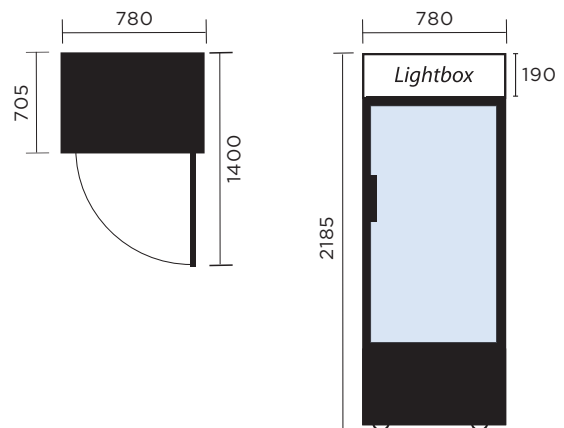


Upright Display Fridge (Flat Glass)

GM0690LB

Part No.	Volume	Weight	
3736222	659L	123kg	
	External (mm)	Internal (mm)	Packaged (mm)
Width	780	702	870
Depth	705	555	750
Height	2185	1682	2200

- Temperature range: +1°C to +5°C
- Max. ambient temp: 43°C
- 7 stars GEMS rating
- 3M1 climate class
- 6 shelf tiers including base for optimal product display
- Lightbox included
- Double glazed Low-E argon glass door reduces energy consumption and condensation

5 YEAR EXTRA CARE WARRANTY

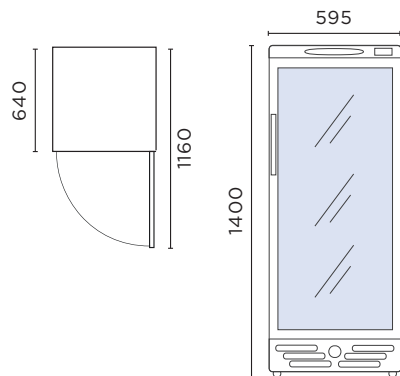


Upright Display Fridge (Flat Glass Door)

GM0220-NR

Part No.	Volume	Weight	
3736033-NR	215L	68kg	
.....			
	External (mm)	Internal (mm)	Packaged (mm)
Width	595	505	665
Depth	640	462	685
Height	1400	1025	1480

- Temperature range: +1°C to +7°C
- Max. ambient temp: 40°C
- 9 stars GEMS rating
- 3M1 climate class
- 4 shelf tiers including base for optimal product display

5 YEAR EXTRA CARE WARRANTY

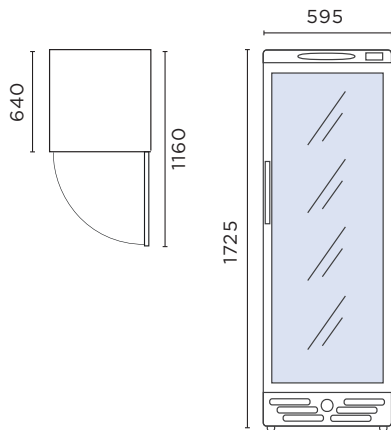

Upright Display Fridge (Flat Glass Door)

GM0300-NR

Part No.	Volume		Weight
3736034-NR	290L		74kg
.....			
	External (mm)	Internal (mm)	Packaged (mm)
Width	595	505	665
Depth	640	462	685
Height	1725	1355	1810

- Temperature range: +1°C to +7°C
- Max. ambient temp: 40°C
- 9 stars GEMS rating
- 3M1 climate class
- 5 shelf tiers including base for optimal product display


5 YEAR EXTRA CARE WARRANTY

drinks

grind you

three beans

BRÜNIC

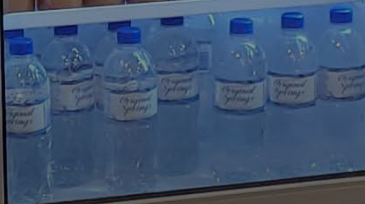


1kg \$55.00

250g \$25.00

Whole beans or ground to order

Whole beans or ground to order



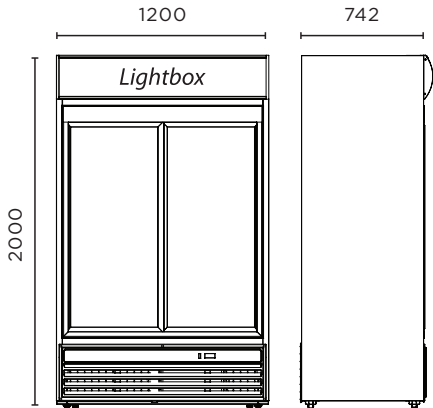


Upright Display Fridge (Sliding Glass Door)

GM0980LS-NR

Part No.	Volume	Weight
3735048-NR	945L	210kg
	External (mm)	Internal (mm)
Width	1200	1090
Depth	742	572
Height	2000	1533
	Packaged (mm)	
		1260
		790
		2160

- Temperature range: +1°C to +10°C
- Maximum ambient temperature: 40°C
- 4 stars GEMS rating
- 3M1 climate class
- 6 shelf tiers including base for optimal product display
- Lightbox included

5 YEAR EXTRA CARE WARRANTY

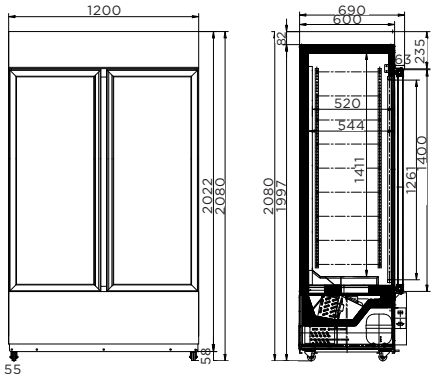


Upright Display Fridge Cassette 2 Doors

GM1000LBCAS

Part No.	Volume	Weight
3736251	960L	188kg
	External (mm)	Internal (mm)
Width	1200	1090
Depth	690	545
Height	2080	1465
	Packaged (mm)	
		1270
		755
		2112

- Temperature range: +2°C to +5°C
- Max. ambient temp: 38°C
- 6 stars GEMS rating
- 3M1 climate class
- 6 shelf tiers including base for optimal product display
- Lightbox included

5 YEAR EXTRA CARE WARRANTY

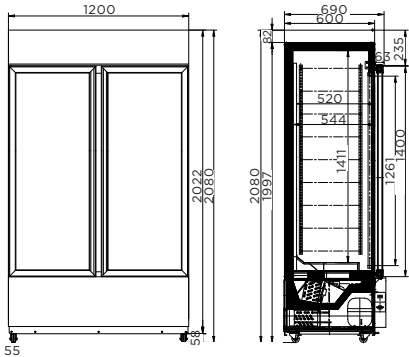

Upright Display Fridge Cassette 2 Doors

GM1000LWCAS

Part No.	Volume	Weight
3736250	960L	188kg
	External (mm)	Internal (mm)
Width	1200	1090
Depth	690	545
Height	2080	1465
	Packaged (mm)	
		1270
		755
		2112

- Temperature range: +2°C to +5°C
- Max. ambient temp: 38°C
- 6 stars GEMS rating
- 3M1 climate class
- 6 shelf tiers including base for optimal product display
- Lightbox included

5 YEAR EXTRA CARE WARRANTY



New Menu

ARTISTIC ROLLS

TIGER
Chicken katsu - Avo roll, top-
grilled w/ Tiger sauce & crunch

VOLCANO **\$18**
1/2 Prawn - Avo roll, topped w/ Crab
Meat, Spicy Mayo, crunch & fish eggs



Premium Upright Display Range

Crafted for excellence, these upright fridges combine sleek design with high energy efficiency. Discover a new era in sustainable refrigeration.

Customisable illuminated lightbox offers a fantastic opportunity to showcase your brand and attract customers' attention

The fridge is suitable for storage of perishable drinks and food, with 3M1 climate class

High-impact LED internal lighting on each side ensures that your products are perfectly illuminated, making them look their best and enticing customers to make a purchase

Argon filled Low-E double glazed glass for improved condensation performance


Adjustable shelves you can easily customise the layout to accommodate drinks or items of different sizes and shapes

Reduce your energy consumption and operating costs, while also minimising your environmental impact thanks to natural refrigerant

Thanks to castors, you can easily move and position the fridge wherever it best suits your floor layout

Powered by a powerful fan-forced refrigeration technology, the fridge ensures even distribution of cool air, keeping your products uniformly chilled



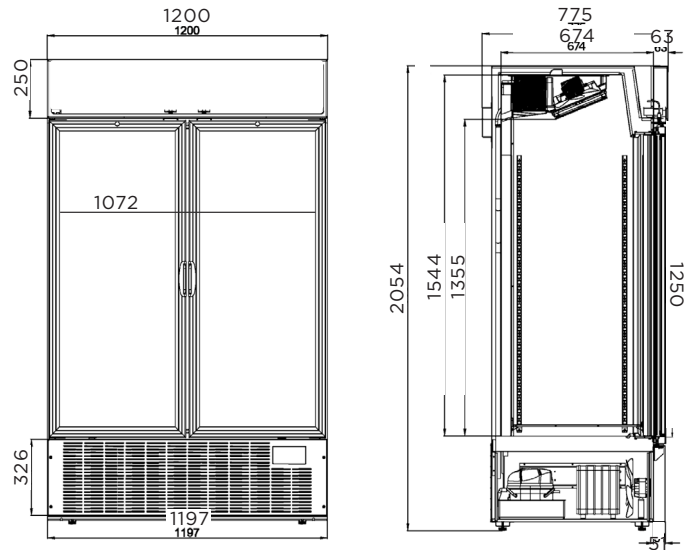

Upright Display Chiller Silver

GM1100LS-NR

Upright Display Chiller Black

GM1100LB-NR

Part No.	Volume	Weight
3736234	1082L	195kg
3736235	1082L	195kg

- Temperature range: +1°C to +5°C
- Max ambient temp: 43°C
- 8 stars GEMS rating
- 3M1 climate class
- 6 shelf tiers including base for optimal product display
- Lightbox included



	External (mm)	Internal (mm)	Packaged (mm)
Width	1200	1090	1240
Depth	775	674	790
Height	2054	1250	2120

5 YEAR EXTRA CARE WARRANTY



SPECIAL ORDER

For GM1100LS-NR

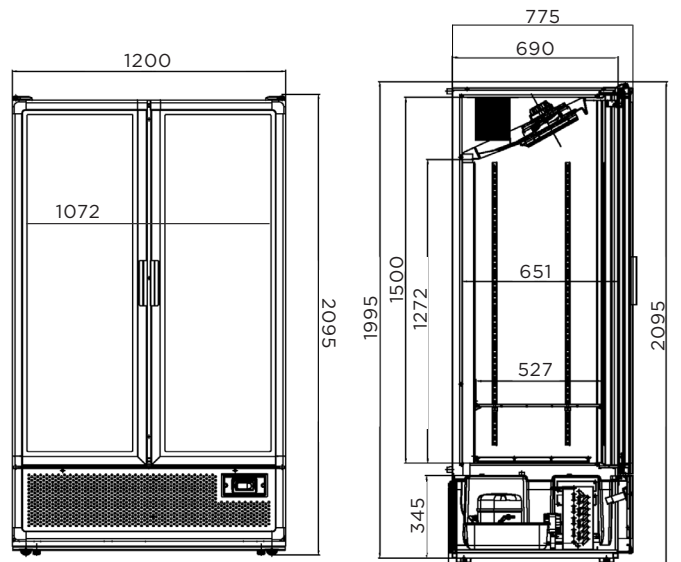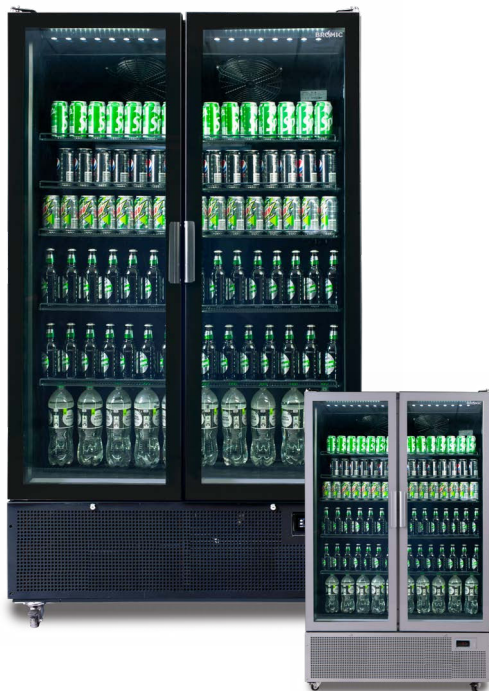

Upright Display Chiller Silver

GM1100S-NR

Upright Display Chiller Black

GM1100B-NR

Part No.	Volume	Weight
3736236	1126L	195kg
3736237	1126L	195kg

- Temperature range: +1°C to +5°C
- Max ambient temp: 43°C
- 8 stars GEMS rating
- 3M1 climate class
- 6 shelf tiers including base for optimal product display
- Lightbox included

	External (mm)	Internal (mm)	Packaged (mm)
Width	1200	1090	1240
Depth	775	674	790
Height	2095	1500	2120

5 YEAR EXTRA CARE WARRANTY



SPECIAL ORDER

For GM1100S-NR

Upright Display Freezers

Bromic's upright display freezer offers generous frozen storage capacity with high-impact presentation for busy commercial settings. A bright LED lightbox and vertical door lighting enhance product visibility and support customer engagement, while six adjustable shelf tiers allow you to tailor the display to suit your range.

High-impact LED lightbox to capture customer's attention

Food safe storage with 3L1 climate class

6 shelf tiers including base for display flexibility

Self-closing doors ensure tight seal every time to minimise heat transfer

Heated, Low-E triple glazed glass for improved condensation performance

2-star GEMS energy Rating

High-impact LED lights on the left and right side of the door.


Fully compliant with Australian safety standards and regulations

35°C maximum ambient temperature for consistent cooling even in extreme heat

Lockable front castors for easy and secure positioning

Accurate temperature control with digital controller



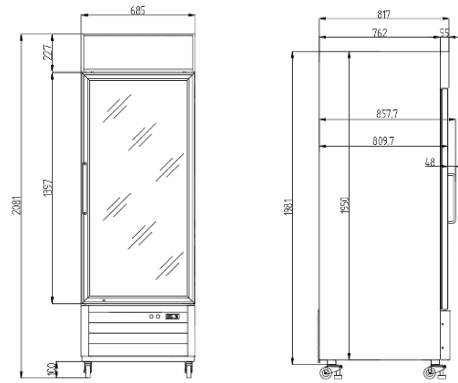


Upright Display Freezer (Flat Glass 1 Door)

UF0550GDL-NR

Part No.	Volume	Weight	
3736263-NR	546L	158kg	
	External (mm)	Internal (mm)	Packaged (mm)
Width	685	569	900
Depth	865	670	900
Height	2081	1534	2132

- Temperature range: -18°C to -22°C
- Max ambient temp: 35°C
- 2 stars GEMS rating
- 3L1 climate class
- 6 shelf tiers including base for optimal product display


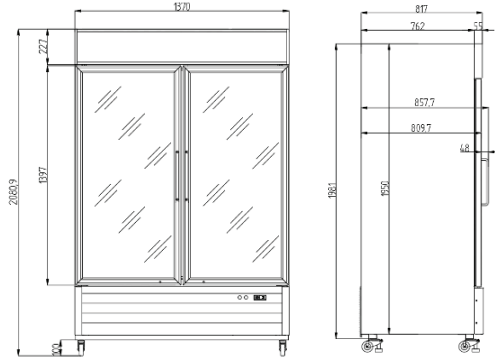
5 YEAR EXTRA CARE WARRANTY


Upright Display Freezer (Flat Glass 2 Door)

UF1250GDL-NR

Part No.	Volume	Weight	
3736264-NR	1266L	256kg	
	External (mm)	Internal (mm)	Packaged (mm)
Width	1370	1254	1430
Depth	865	670	898
Height	2081	1534	2132

- Temperature range: -18°C to -22°C
- Max ambient temp: 35°C
- 2 stars GEMS rating
- 3L1 climate class
- 6 shelf tiers including base for optimal product display

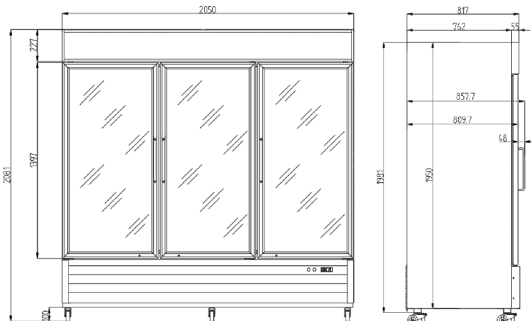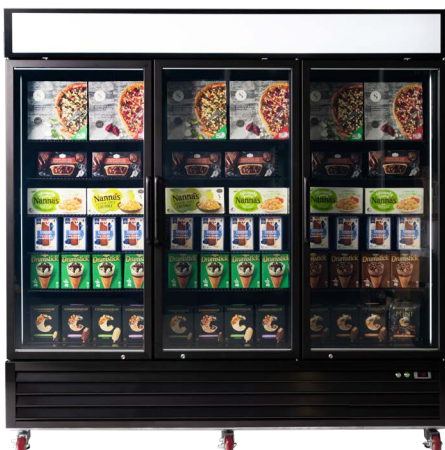5 YEAR EXTRA CARE WARRANTY


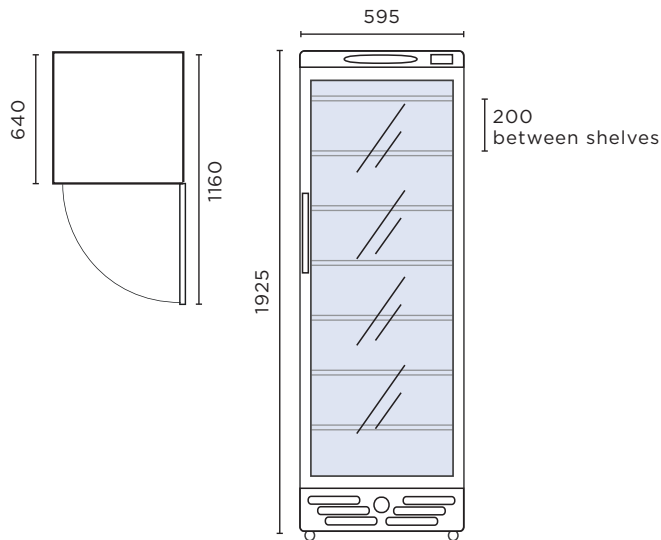
Upright Display Freezer (Flat Glass 3 Door)

UF1980GDL-NR

Part No.	Volume	Weight	
3736265-NR	1980L	374kg	
	External (mm)	Internal (mm)	Packaged (mm)
Width	2050	1934	2110
Depth	865	670	898
Height	2081	1534	2132

- Temperature range: -18°C to -22°C
- Max ambient temp: 35°C
- 2 stars GEMS rating
- 3L1 climate class
- 6 shelf tiers including base for optimal product display

5 YEAR EXTRA CARE WARRANTY




Upright Display Freezer (Flat Glass)

UF0374S-NR

Part No.	Volume	Weight	
3736045-NR	300L	100kg	
	External (mm)	Internal (mm)	Packaged (mm)
Width	595	475	665
Depth	640	440	685
Height	1925	1550	1950

- Temperature range: -22°C to -18°C
- Max ambient temp: 35°C
- 4 stars GEMS rating
- 3L1 climate class
- 7 shelf tiers including base for optimal product display

5 YEAR EXTRA CARE WARRANTY

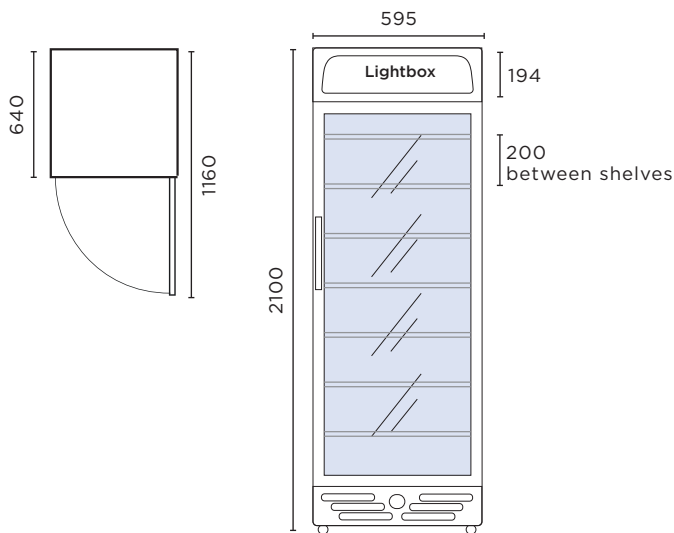

Upright Display Freezer (Flat Glass)

UF0374LS-NR

Part No.	Volume	Weight	
3736046-NR	300L	106kg	
	External (mm)	Internal (mm)	Packaged (mm)
Width	595	475	665
Depth	640	440	685
Height	2100	1550	2100

- Temperature range: -22°C to -18°C
- Max ambient temp: 35°C
- 4 stars GEMS rating
- 3L1 climate class
- 7 shelf tiers including base for optimal product display
- Lightbox included

5 YEAR EXTRA CARE WARRANTY



The
Nosh
Project

NOVA STATE
PET NUTRITION

Frozen food



Frozen food

Fresh food



Upright Storage Fridges

Bromic's Storage Fridges are designed for the fast-paced commercial kitchen, engineered for efficiency, and built with high-quality stainless steel for durability. These units boast a spacious interior with convenient shelving and a powerful cooling system.

The digital temperature controller allows you to easily set and maintain the ideal temperature for your products, ensuring their freshness and quality

The internal LED lighting illuminates the interior of the fridge, making it easy to locate and identify specific products, even in low-light conditions


The solid stainless steel insulated exterior and self-closing door minimise heat ingress to maintain the optimal temperature inside the fridge and reduce energy consumption

Adjustable stainless steel shelves that can accommodate 2/1 Gastronorm trays, you can easily organise and customise your storage space to suit your needs

Reduce your energy consumption and operating costs while also minimising your environmental impact thanks to natural refrigerant


With lockable castors, you can easily move and position the freezer wherever it best suits your floor layout

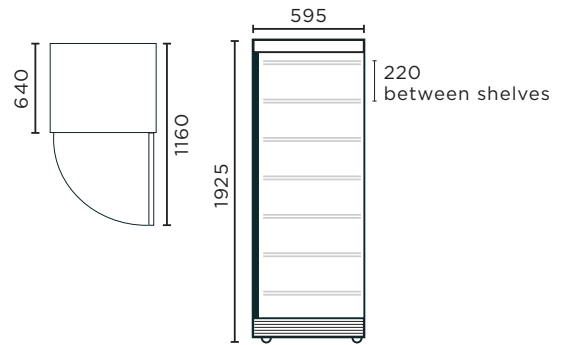

**Upright Storage Fridge (Solid Door)****UC0374SDW-NR**


Part No.	Volume	Weight	
3735127-NR	372L	88kg	
.....			
	External (mm)	Internal (mm)	Packaged (mm)
Width	595	505	665
Depth	640	462	685
Height	1925	1555	2010

- Temperature range: +1°C to +7°C
- Max ambient temp: 40°C
- 4 stars GEMS rating
- 4M1 climate class
- 7 shelf tiers including base for optimal product display

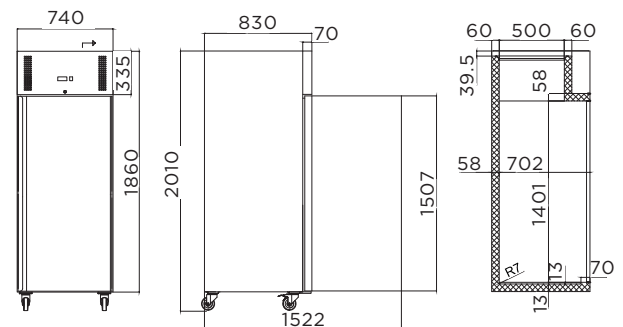5 YEAR EXTRA CARE WARRANTY**Upright Storage Fridge (Stainless Steel)****UC0650SD-NR-1**

Part No.	Volume	Weight	
3735161-NR-1	650L	143kg	
.....			
	External (mm)	Internal (mm)	Packaged (mm)
Width	740	624	769
Depth	830	685	855
Height	2010	1390	2062

- Temperature range: +1°C to +5°C
- Max ambient temp: 38°C
- 2 stars GEMS rating
- 4M1 climate class
- 6 shelf tiers including base for optimal product display

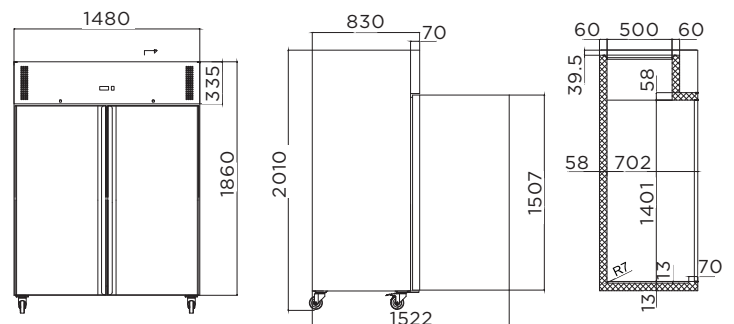5 YEAR EXTRA CARE WARRANTY**Upright Storage Fridge (Stainless Steel)****UC1300SD-NR-1**


Part No.	Volume	Weight	
3735200-NR-1	1300L	213kg	
	External (mm)	Internal (mm)	Packaged (mm)
Width	1480	1360	1510
Depth	830	685	855
Height	2010	1390	2062

- Temperature range: +1°C to +5°C
- Max ambient temp: 38°C
- 2 stars GEMS rating
- 4M1 climate class
- 6 shelf tiers including base for optimal product display

5 YEAR EXTRA CARE WARRANTY


Constructed from high-quality, durable stainless steel, our Upright Freezers have been specifically designed for use in demanding kitchen environments. They offer a convenient, spacious, and heavy-duty frozen storage solution for perishable foods and beverages.

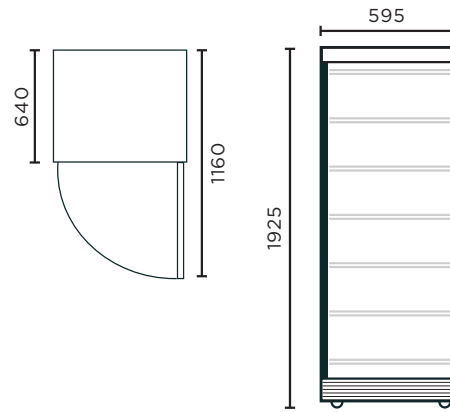

**Upright Storage Freezer (Solid Door)****UF0374SDS-NR**


Part No.	Volume	Weight	
3735106-NR	300L	97kg	
.....			
	External (mm)	Internal (mm)	Packaged (mm)
Width	595	475	665
Depth	640	440	685
Height	1925	1550	2010

- Temperature range: -22°C to -18°C
- Max ambient temp: 35°C
- 7 stars GEMS rating
- 4L1 climate class
- 7 shelf tiers including base for optimal product display

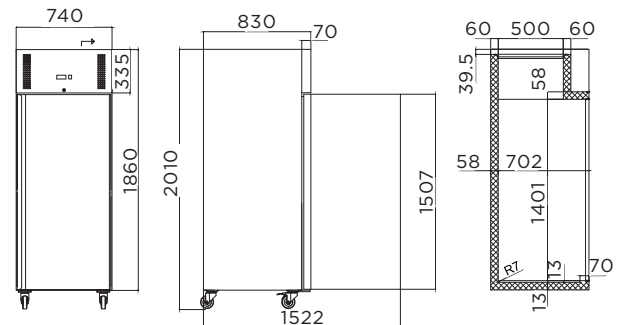5 YEAR EXTRA CARE WARRANTY**Green Cooling™****Upright Storage Freezer (Stainless Steel)****UF0650SDF-NR-1**

Part No.	Volume	Weight	
3735203-NR-1	650L	147kg	
.....			
	External (mm)	Internal (mm)	Packaged (mm)
Width	740	624	769
Depth	830	685	855
Height	2010	1390	2062

- Temperature range: -22°C to -18°C
- Max ambient temp: 38°C
- 2 stars GEMS rating
- 4L1 climate class
- 6 shelf tiers including base for optimal product display

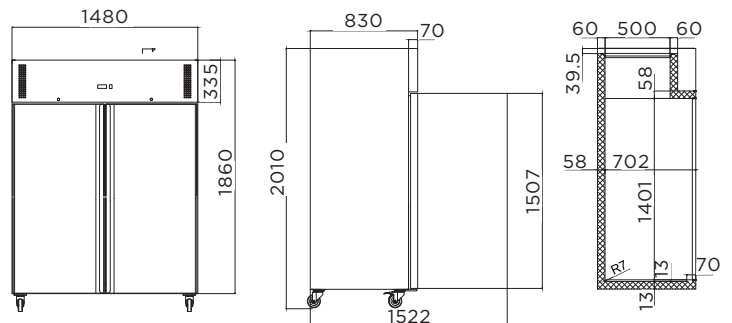5 YEAR EXTRA CARE WARRANTY**Green Cooling™****Upright Storage Freezer (Stainless Steel)****UF1300SDF-NR-1**


Part No.	Volume	Weight	
3735194-NR-1	1300L	226kg	
	External (mm)	Internal (mm)	Packaged (mm)
Width	1480	1360	1510
Depth	830	685	855
Height	2010	1390	2062

- Temperature range: -22°C to -18°C
- Max ambient temp: 38°C
- 3 stars GEMS rating
- 4L1 climate class
- 6 shelf tiers including base for optimal product display

5 YEAR EXTRA CARE WARRANTY**Green Cooling™**



Model	GM0220-NR	GM0300-NR	GM0374-NR	GM0374L-NR
Part Number	3736033-NR	3736034-NR	3736035-NR	3736036-NR
Ext. Width (mm)*	595	595	595	595
Ext. Depth (mm)*	640	640	640	640
Ext. Height (mm)*	1400	1725	1950	2100
Volume	215L	290L	372L	372L
Unit Weight	68kg	74kg	81kg	85kg
Adjustable Temp. Range	+1 to +7°C	+1 to +7°C	+1 to +7°C	+1 to +7°C
Max. Ambient Temp.	40°C	40°C	40°C	40°C
Climate Class	3M1	3M1	3M1	3M1
Energy Consumption	1.9kWh/24h	1.865kWh/24h	1.98kWh/24h	1.98kWh/24h
GEMS Star Rating	9 stars	9 stars	9 stars	9 stars
Refrigeration Capacity	235W	290W	350W	370W
Rated Current	1.18A	1.4A	1.23A	1.23A
Electrical Voltage	220-240V	220-240V	220-240V	220-240V
Refrigerant	R600a	R600a	R600a	R600a
Frequency	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom left	Rear, bottom left	Rear, bottom left	Rear, bottom left
Features				
Internal Light	LED	LED	LED	LED
Number of Doors	1	1	1	1
Door Type	Glass	Glass	Glass	Glass
Door Glass Type	Double Glazed	Double Glazed	Double Glazed	Double Glazed
Door Style	Hinged	Hinged	Hinged	Hinged
Door Swing Dimension	600mm	600mm	600mm	600mm
Total Depth of Door Open	1160mm	1160mm	1160mm	1160mm
Self-Closing Door	Yes	Yes	Yes	Yes
Door Lock	No	No	No	No
No. of Shelf Tiers incl. Base	4	5	6	6
Shelf Type	Adjustable	Adjustable	Adjustable	Adjustable
Shelves Dimensions	499(w) x 360(d) mm	499(w) x 360(d) mm	499(w) x 360(d) mm	499(w) x 360(d) mm
Temp. Controller	Analogue	Analogue	Analogue	Analogue
Feet / Castors	Yes	Yes	Yes	Yes
Colour	White with silver trim	White with silver trim	White with silver trim	White with silver trim
Warranty				
Parts & Labour (Years)	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes



Model	GM0690LW	GM0690LB
Part Number	3736219	3736222
Ext. Width (mm)*	780	780
Ext. Depth (mm)*	705	705
Ext. Height (mm)*	2185	2185
Volume	659L	659L
Unit Weight	123kg	123kg
Adjustable Temp. Range	+1 to +5°C	+1 to +5°C
Max. Ambient Temp.	43°C	43°C
Climate Class	3M1	3M1
Energy Consumption	3.995kWh/24h	3.995kWh/24h
GEMS Star Rating	7 stars	7 stars
Refrigeration Capacity	485W	485W
Rated Current	3.8A	3.8A
Electrical Voltage	220-240V	220-240V
Refrigerant	R290	R290
Frequency	50Hz	50Hz
Power Supply	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A
Plug Location	Rear, bottom right	Rear, bottom right
Features		
Internal Light	LED	LED
Number of Doors	1	1
Door Type	Glass	Glass
Door Glass Type	Double Glazed Low-E Glass + Argon Gas	Double Glazed Low-E Glass + Argon Gas
Door Style	Hinged	Hinged
Door Swing Dimension	695mm	695mm
Total Depth of Door Open	1400mm	1400mm
Self-Closing Door	Yes	Yes
Door Lock	No	No
No. of Shelf Tiers incl. Base	6	6
Shelf Type	Adjustable	Adjustable
Shelves Dimensions	680(w) x 480(d) mm	680(w) x 480(d) mm
Temp. Controller	Digital	Digital
Feet / Castors	Yes	Yes
Colour	White	Black
Warranty		
Parts & Labour (Years)	5	5
Bromic Extra Care	Yes	Yes



Model	UC0550GDL-NR	UC1250GDL-NR	UC1980GDL-NR	GM0980LS-NR
Part Number	3736260-NR	3736261-NR	3736262-NR	3735048-NR
Ext. Width (mm)*	685	1370	2050	1200
Ext. Depth (mm)*	865	865	865	742
Ext. Height (mm)*	2081	2081	2081	2000
Volume	546L	1266L	1980L	945L
Unit Weight	136kg	232kg	314kg	210kg
Adjustable Temp. Range	+1 to +10°C	+1 to +10°C	+1 to +10°C	+1 to +10°C
Max. Ambient Temp.	38°C	38°C	38°C	40°C
Climate Class	3M1	3M1	3M1	3M1
Energy Consumption	4.34kWh/24h	7.65kWh/24h	10.49kWh/24h	8.71kWh/24h
GEMS Star Rating	6 stars	5 stars	5 stars	4 stars
Refrigeration Capacity	462W	616W	990W	850W
Rated Current	2.1A	2.8A	4.5A	3.94A
Electrical Voltage	240V	240V	240V	220-240V
Refrigerant	R290	R290	R290	R290
Frequency	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom left	Rear, bottom left	Rear, bottom left	Rear, bottom left
Features				
Internal Light	LED	LED	LED	LED
Number of Doors	1	2	3	2
Door Type	Glass	Glass	Glass	Glass
Door Glass Type	Double Glazed Low-E Glass	Double Glazed Low-E Glass	Double Glazed Low-E Glass	Double Glazed
Door Style	Hinged	Hinged	Hinged	Sliding
Door Swing Dimension	696mm	696mm	696mm	-
Total Depth of Door Open	1513mm	1513mm	1513mm	-
Self-Closing Door	Yes	Yes	Yes	Yes
Door Lock	Yes	Yes	Yes	No
No. of Shelf Tiers incl. Base	6	6	6	6
Shelf Type	Adjustable	Adjustable	Adjustable	Adjustable
Shelves Dimensions	545(w) x 595(d) mm	611(w) x 595(d) mm	611(w), 666(w middle) x 595(d) mm	1072(w) x 470(d) mm
Temp. Controller	Digital	Digital	Digital	Digital
Feet / Castors	Yes	Yes	Yes	Yes
Colour	Black	Black	Black	Black
Warranty				
Parts & Labour (Years)	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes



Model	GM1000LBCAS	GM1000LWCAS
Part Number	3736250	3736250
Ext. Width (mm)*	1200	1200
Ext. Depth (mm)*	690	690
Ext. Height (mm)*	2080	2080
Volume	960L	960L
Unit Weight	188kg	188kg
Adjustable Temp. Range	+2 to +5°C	+2 to +5°C
Max. Ambient Temp.	38°C	38°C
Climate Class	3M1	3M1
Energy Consumption	6.86kWh/24h	6.86kWh/24h
GEMS Star Rating	6 stars	6 stars
Refrigeration Capacity	520W	520W
Rated Current	2.3A	2.3A
Electrical Voltage	220-240V	220-240V
Refrigerant	R290	R290
Frequency	50Hz	50Hz
Power Supply	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A
Plug Location	Rear, bottom left	Rear, bottom left
Features		
Internal Light	LED	LED
Number of Doors	2	2
Door Type	Glass	Glass
Door Glass Type	Double Glazed	Double Glazed
Door Style	Hinged	Hinged
Door Swing Dimension	600mm	600mm
Total Depth of Door Open	1220mm	1220mm
Self-Closing Door	Yes	Yes
Door Lock	Yes	Yes
No. of Shelf Tiers incl. Base	6	6
Shelf Type	Adjustable	Adjustable
Shelves Dimensions	527(w) x 478(d) mm	527(w) x 478(d) mm
Temp. Controller	Digital	Digital
Feet / Castors	Yes	Yes
Colour	Black	White
Warranty		
Parts & Labour (Years)	5	5
Bromic Extra Care	Yes	Yes



SPECIAL ORDER



SPECIAL ORDER

Model	GM1100LS-NR	GM1100LB-NR	GM1100B-NR	GM1100S-NR
Part Number	3736234	3736235	3736237	3736236
Ext. Width (mm)*	1200	1200	1200	1200
Ext. Depth (mm)*	775	775	775	775
Ext. Height (mm)*	2054	2054	2095	2095
Volume	1082L	1082L	1126L	1126L
Unit Weight	195kg	195kg	195kg	195kg
Adjustable Temp. Range	-1°C to +5°C	-1°C to +5°C	-1°C to +5°C	-1°C to +5°C
Max. Ambient Temp.	43°C	43°C	43°C	43°C
Climate Class	3M1	3M1	3M1	3M1
Energy Consumption	4.06 kWh/24h	4.06 kWh/24h	3.54 kWh/24h	3.54 kWh/24h
GEMS Star Rating	8 stars	8 stars	8 stars	8 stars
Refrigeration Capacity	1065W	1065W	1097W	1097W
Rated Current	5A	5A	5A	5A
Electrical Voltage	220-240V	220-240V	220-240V	220-240V
Refrigerant	R290	R290	R290	R290
Frequency	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom right	Rear, bottom right	Rear, bottom right	Rear, bottom right
Features				
Internal Light	LED	LED	LED	LED
Number of Doors	2	2	2	2
Door Type	Glass	Glass	Glass	Glass
Door Glass Type	Double glazed Low-E Glass + Argon Gas	Double glazed Low-E Glass + Argon Gas	Double glazed Low-E Glass + Argon Gas	Double glazed Low-E Glass + Argon Gas
Door Style	Hinged	Hinged	Hinged	Hinged
Door Swing Dimension	512mm	512mm	512mm	512mm
Total Depth of Door Open	1303mm	1303mm	1303mm	1303mm
Self-Closing Door	Yes	Yes	Yes	Yes
Door Lock	Yes	Yes	Yes	Yes
No. of Shelf Tiers incl. Base	6	6	6	6
Shelf Type	Adjustable	Adjustable	Adjustable	Adjustable
Shelves Dimensions	1072(w) x 527(d) mm	1072(w) x 527(d) mm	1072(w) x 527(d) mm	1072(w) x 527(d) mm
Temp. Controller	Digital	Digital	Digital	Digital
Feet / Castors	Yes	Yes	Yes	Yes
Colour	Silver	Black	Black	Silver
Warranty				
Parts & Labour (Years)	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes





Model	UF0374S-NR	UF0374LS-NR	UF0550GDL-NR	UF1250GDL-NR	UF1980GDL-NR
Part Number	3736045-NR	3736046-NR	3736263-NR	3736264-NR	3736265-NR
Ext. Width (mm)*	595	595	685	1370	2050
Ext. Depth (mm)*	640	640	865	865	865
Ext. Height (mm)*	1925	2100	2081	2081	2081
Volume	300L	300L	546L	1266L	1980L
Unit Weight	100kg	106kg	158kg	256kg	374kg
Adjustable Temp. Range	-22°C to -18°C	-22°C to -18°C	-18 to -22°C	-18 to -22°C	-18 to -22°C
Max. Ambient Temp.	35°C	35°C	35°C	35°C	35°C
Climate Class	3L1	3L1	3L1	3L1	3L1
Energy Consumption	8.267kWh/24h	8.267kWh/24h	10.46kWh/24h	20.54kWh/24h	30.71kWh/24h
GEMS Star Rating	4 stars	4 stars	2 stars	2 stars	2 star
Refrigeration Capacity	270W	635W	816W	1232W	1909W
Rated Current	3.26A	3.26A	3.71A	5.6A	8.68A
Electrical Voltage	220-240V	220-240V	240V	240V	240V
Refrigerant	R290	R290	R290	R290	R290
Frequency	50Hz	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A	1 x 10A	1 x 15A
Plug Location	Rear, bottom left	Rear, bottom left	Rear, bottom right	Rear, bottom right	Rear, bottom right
Features					
Internal Light	LED	LED	LED	LED	LED
Number of Doors	1	1	1	2	3
Door Type	Glass	Glass	Glass	Glass	Glass
Door Glass Type	Triple Glazed	Triple Glazed	Triple Glazed Low-E Glass	Triple Glazed Low-E Glass	Triple Glazed Low-E Glass
Door Style	Hinged	Hinged	Hinged	Hinged	Hinged
Door Swing Dimension	600mm	600mm	696mm	696mm	696mm
Total Depth of Door Open	1160mm	1160mm	1513mm	1513mm	1513mm
Self-Closing Door	Yes	Yes	Yes	Yes	Yes
Door Lock	No	No	Yes	Yes	Yes
No. of Shelf Tiers incl. Base	7	7	6	6	6
Shelf Type	Fixed	Fixed	Adjustable	Adjustable	Adjustable
Shelves Dimensions	466(w) x 214(d) mm	466(w) x 214(d) mm	545(w) x 595(d) mm	611(w) x 595(d) mm	611(w), 666 (w middle) x 595(d) mm
Temp. Controller	Analogue	Analogue	Digital	Digital	Digital
Feet / Castors	Yes	Yes	Yes	Yes	Yes
Colour	White with silver trim	White with silver trim	Black	Black	Black
Warranty					
Parts & Labour (Years)	5	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes	Yes



Model	UC0374SDW-NR	UC0650SD-NR-1	UC1300SD-NR-1	UF0374SDS-NR	UF0650SDF-NR-1	UF1300SDF-NR-1
Part Number	3735127-NR	3735161-NR	3735200-NR	3735106-NR	3735203-NR	3735194-NR
Ext. Width (mm)*	595	740	1480	595	740	1480
Ext. Depth (mm)*	640	830	830	640	830	830
Ext. Height (mm)*	1925	2010	2010	1925	2010	2010
Volume	372L	650L	1300L	300L	650L	1300L
Unit Weight	88kg	143kg	213kg	97kg	147kg	226kg
Adjustable Temp. Range	+1 to +7°C	+1 to +5°C	+1 to +5°C	-22 to -18°C	-22 to -18°C	-22 to -18°C
Max. Ambient Temp.	40°C	38°C	38°C	35°C	38°C	38°C
Climate Class	4M1	4M1	4M1	4L1	4L1	4L1
Energy Consumption	1.794kWh/24h	2.55kWh/24h	4.18kWh/24h	1.823kWh/24h	8.26kWh/24h	13.617kWh/24h
GEMS Star Rating	4 stars	2 stars	2 stars	7 stars	2 stars	3 stars
Refrigeration Capacity	350W	360W	520W	270W	640W	800W
Rated Current	1.23A	3A	3.4A	2.9A	4.2A	6A
Electrical Voltage	220-240V	220-240V	220-240V	220-240V	220-240V	220-240V
Refrigerant	R600a	R290	R290	R290	R290	R290
Frequency	50Hz	50Hz	50Hz	50Hz	50Hz	50Hz
Power Supply	Single Phase	Single Phase	Single Phase	Single Phase	Single Phase	Single Phase
Power Plug	1 x 10A	1 x 10A	1 x 10A	1 x 10A	1 x 10A	1 x 10A
Plug Location	Rear, bottom left	Rear, top left	Rear, top left	Rear, bottom left	Rear, top left	Rear, top left
Features						
Internal Light	Fluorescent	LED	LED	Fluorescent	LED	LED
Number of Doors	1	1	2	1	1	2
Door Type	Solid	Solid	Solid	Solid	Solid	Solid
Door Shape	Flat	Flat	Flat	Flat	Flat	Flat
Door Style	Hinged	Hinged	Hinged	Hinged	Hinged	Hinged
Door Swing Dimension	600mm	830mm	830mm	600mm	830mm	830mm
Total Depth of Door Open	1160mm	1520mm	1520mm	1160mm	1520mm	1520mm
Self-Closing Door	Yes	Yes	Yes	Yes	Yes	Yes
Door Lock	No	Yes	Yes	No	Yes	Yes
No. of Shelf Tiers incl. Base	7	6	6	7	6	6
Shelf Type	Adjustable	Adjustable	Adjustable	Fixed	Adjustable	Adjustable
Shelves Dimensions	499(w) x 360(d) mm	530(w) x 650(d) mm	530(w) x 650(d) mm	466(w) x 214(d) mm	530(w) x 650(d) mm	530(w) x 650(d) mm
Temp. Controller	Analogue	Digital	Digital	Analogue	Digital	Digital
Feet / Castors	Yes	Yes	Yes	Yes	Yes	Yes
Colour	White with black details	Stainless Steel	Stainless Steel	White with black details	Stainless Steel	Stainless Steel
Warranty						
Parts & Labour (Years)	5	5	5	5	5	5
Bromic Extra Care	Yes	Yes	Yes	Yes	Yes	Yes

Menu board listing items and prices:

Nidella Banana Crepe	16
Strawberry Crème Crepe	16
Shockolate	20
Pancake	20
Double Fortune	20
Croffle Pizza	23
Party Fondue	29

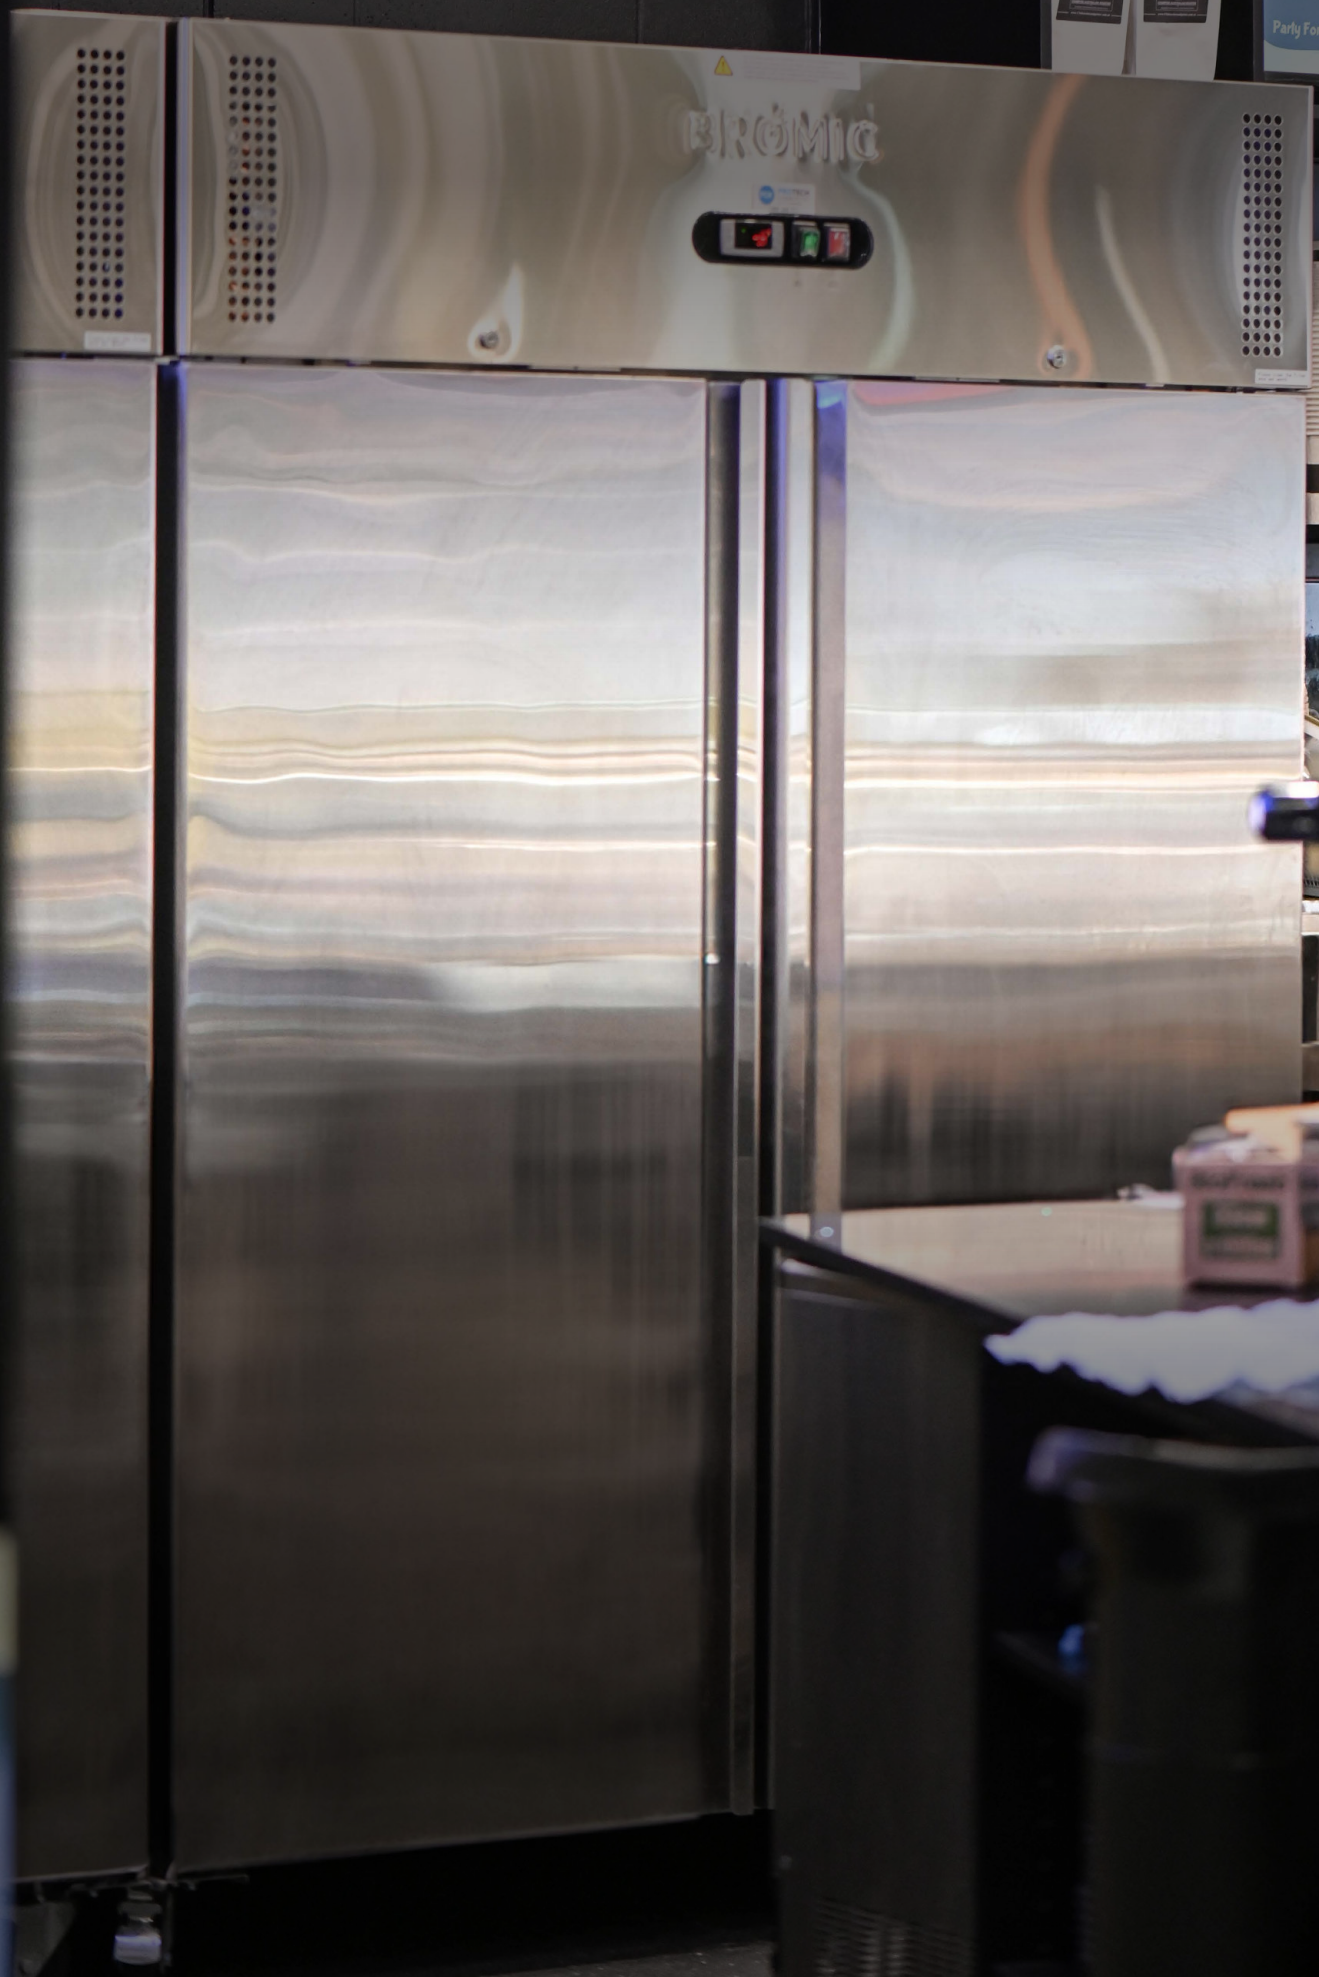

BROMIC REFRIGERATION

10 Phiney Place, Ingleburn (Sydney)
NSW 2565 Australia
T. 1300 276 642

For further product information
bromicrefrigeration.com.au

