

Upright Display Fridge 1980L - 3 Door - Flat Glass

Upright Display Fridge

High-impact LED lightbox to capture customer's attention

Food safe storage with 3M1 climate class

5-star GEMS energy Rating

6 shelf tiers including base for display flexibility

High-impact LED lights on the left and right side of the door.

Self-closing doors ensure tight seal every time to minimise heat transfer

Fully compliant with Australian safety standards and regulations

Heated, Low-E double glazed glass for improved condensation performance

38°C maximum ambient temperature for consistent cooling even in extreme heat




Lockable front castors for easy and secure positioning

Accurate temperature control with digital controller

Upright Display Fridge

1980L - 3 Door - Flat Glass

Upright Display Fridge

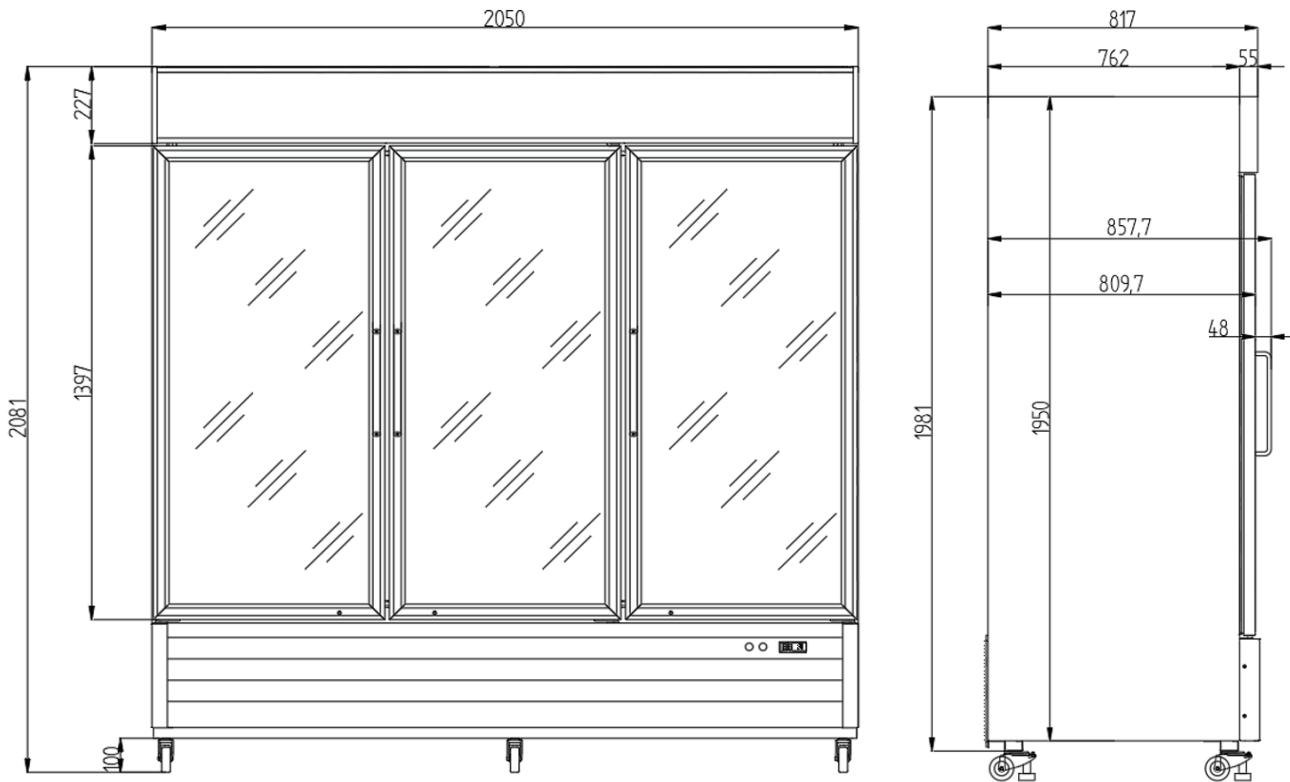

SPECIFICATIONS

SPECIFICATIONS				DIMENSIONS
Part Number	3736262-NR	Internal Light	LED	External (mm)
Volume	1980L	Colour Temp.	6500K	Width 2050
Unit Weight	314kg	No. of Doors	3	Depth 865
Packaged Weight	324kg	Door Type	Glass	Height 2081
Adjustable Temp. Range	1°C to 10°C	Door Glass Type	Double glazed Low-E Glass	Internal (mm)
Max. Ambient Temp. Range	38°C	Door Shape	Flat	Width 1934
Climate Class	3M1	Door Style	Hinged	Depth 670
GEMS Star Rating	5	Door Lock	Yes	Height 1534
Energy Consumption	10.49kWh/24h	Self-Closing Door	Yes	
Refrigeration Capacity	990W	Door Swing Dimension	696mm	
Refrigerant	R290	Total Depth of Door Open	1513mm	
Air-Circulation	Fan Forced	No. of Shelf Tiers incl Base	6	
Rated Current	4.5A	Shelf Type	Adjustable	
Electrical Voltage	240V	Shelf Dimensions	611(w), 666 (w middle) x 595(d) mm	Packaged (mm)
Frequency	50Hz	Temp. Controller	Digital	
Power Supply	Single Phase	Castors	Yes	Width 2110
Power Plug	1 x 10A	Colour	Black	Depth 898
Plug Location	Rear, bottom right	Warranty	5 Years Bromic Extra Care Warranty - Parts and Labour	Height 2132
Cord Length	3m			