


Upright Display Fridge 1126L - 2 Door - Flat Glass

| Upright Display Fridge



6 shelf tiers including base for display flexibility

Self-closing doors ensure tight seal every time to minimise heat transfer

Argon filled Low-E double glazed glass for improved condensation performance



8-star GEMS energy rating

High-impact LED lights on all sides of the door and inside the unit for maximum product exposure

Fully compliant with Australian safety standards and regulations

43°C maximum ambient temperature for consistent cooling even in extreme heat


Lockable front castors for easy and secure positioning


Accurate temperature control with digital controller



Upright Display Fridge 1126L - 2 Door - Flat Glass

Upright Display Fridge

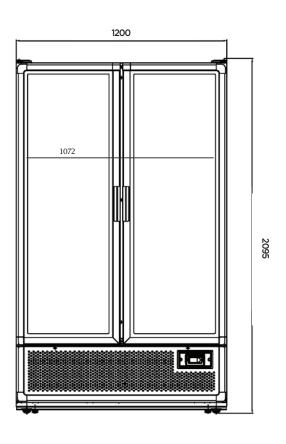

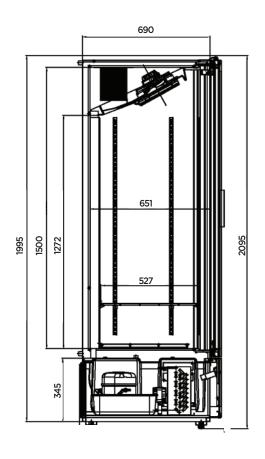

SPECIFICATIONS				DIMENSIONS	
Part Number	3736237	Internal Light	LED		External
Volume	1126L	Colour Temp.	6500K		(mm)
Unit Weight	195kg	No. of Doors	2	Width	1200
Packaged Weight	210kg	Door Type	Glass	Depth	775
Adjustable Temp. Range	-1 to 5°C	Door Glass Type	Double glazed Low-E Glass + Argon Gas	Height	2095
Max. Ambient Temp. Range	43°C	Door Shape	Flat	пеідііі	2093
Climate Class	3M1	Door Style	Hinged		
GEMS Star Rating	8	Door Lock	Yes		Internal
Energy Consumption	3.54 kWh/24h	Self-Closing Door	Yes		(mm)
Refrigeration Capacity	1097W	Door Swing Dimension	512mm	Width	1090
Refrigerant	R290	Total Depth of Door Open	1303mm	Depth	674
Air-Circulation	Fan Forced	No. of Shelf Tiers incl Base	6	Height	1500
Rated Current	5A	Shelf Type	Adjustable		
Electrical Voltage	220-240V	Shelf Dimensions	1072(w) x 527(d) mm		Packaged
Frequency	50Hz	Temp. Controller	Digital		(mm)
Power Supply	Single Phase	Castors	Yes	Width	1240
Power Plug	1 x 10A	Colour	Black	Depth	790
Plug Location	Rear, bottom right	Warranty	4 Years Bromic Extra Care Warranty - Labour and Par	ts Height	2120
Cord Length	2.5m		. Tours Drawns Date Vallating Education and Far		